

Softcooker XP

- Riscaldatore termoregolato ad alta precisione
- Visualizzatore di temperatura e tempo esercizio
- 25 programmi memorizzabili
- Nuovo software di controllo e visualizzazione a display
- Partenza posticipata programmabile
- Contacicli e contatempo di utilizzo
- Struttura in acciaio inox IP X3.
- Dispositivo di protezione automatico in caso di utilizzo a secco.
- Ventola di circolazione per favorire una ottima miscelazione del prodotto.
- Dispositivo di blocco motore se rilevata sovratensione e sovratemperatura.

Opzioni

- Vasca 1/1 GN inox con coperchio
- Vasca 2/1 GN inox con coperchio
- Coperchio vasca per un maggior isolamento termico e una minor dispersione di calore - Energy Saving!
- Divisorio buste sottovuoto

- High precision warmer with temperature control
- Working temperature display
- 25 customer programmable recipes
- New control and display software
- Delayed start available for every recipe
- Cycle and usage time counters
- IP X3 protection rated stainless steel structure
- Protection device switches off the warmer in case of accidental use outside the liquid.
- Circulating pump to help the best product mixing.
- Temperature sensor to prevent overload and overheating.

Optionals



- 1/1 GN s/steel container with lid
- 2/1 GN s/steel container with lid
- Lid for better thermal insulation and less waste of heat - Energy Saving!
- Vacuum bags dividing



Optional:
Divisorio buste sottovuoto
Vacuum bags dividing



Optional:
Divisorio buste sottovuoto
Vacuum bags dividing

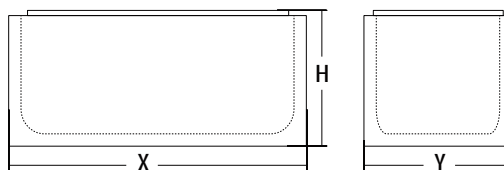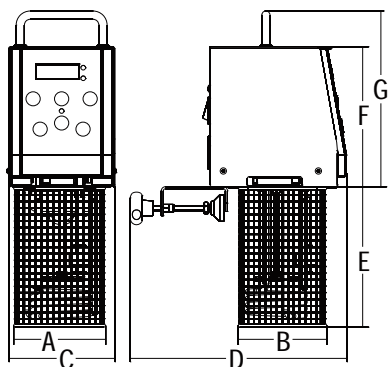

	n alt/Sp.		°C	lt	lt	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg	mm	Kg
SOFTCOOKER	2000	1ph	24÷ 99 °C															
1/1 GN Vasca / Container	-	-	-	27	22	110	105	130	260	170	170	210	-	-	-	4,5	330x455x240	5,5
2/1 GN Vasca / Container	-	-	-	57,5	43	-	-	-	-	-	-	-	565	360	230	7,7	720x500x350	11,5
													650	530	230	13	750x650x400	16