



COOL1

80
lt/h150
lt/hstainless
STEELICE
BANKGAS
R290


fizz

	COOL1 80 FIZZ	COOL1 150 FIZZ
Cooling capacity (l/h)	80	150
Max continuous supply (l)	45	80
Cold water temperature*	5 - 12 °C	
Pump	Professional membrane carbonation pump	Professional rotary carbonation pump
Cooling technology	Ice bank - single stainless steel coil	Ice bank - double coil in stainless steel
Ice bank capacity (l)	14	18
Ice bank (kg)	5	8
Condensation	Forced ventilation	
Refrigerant gas	R290	
Adjustable thermostat	Yes	
Supply	230 V - 50 Hz	
Compressor power	1/5 HP	1/3 HP
Absorbed power	440 W - 1,9 A	920 W - 4 A
Working room temperature	Min 5°C - Max 35°C	
Inlet water pipe	Ø5/16" (8 mm)	
Inlet CO ₂ pipe	Ø5/16" (8 mm)	
Dispensing area height (mm)	297	
Typology	Floor standing	
Net weight (kg)	42	49
Gross weight (kg)	48	55
Dimensions W x D x H (mm)	479 x 428x 1440	
Packaging dimensions (mm)	520 x 474 x 1562	
Dispensing options	Cold still water, cold sparkling water and room temperature water	
Materials	Robust stainless steel e Parts interne in acciaio zincato	
Push buttons	Push buttons elettronici con erogazione d'acqua continua o a intermittenza	

OTHER CHARACTERISTICS

Safety inlet valve
 Predisposition for fixing filters and CO₂ Cylinder (max. diam. 160mm) inside the machine

* rated at a room temp. of 25 °C and inlet water temp. of 20 °C

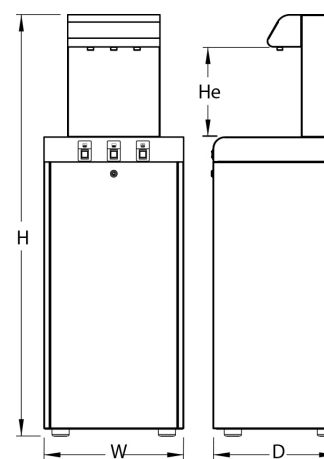

CERTIFICATIONS

