



BOX




	BOX 60 FIZZ	BOX 80 FIZZ
Cooling capacity (l/h)	60	80
Max continuous supply (l)	18	45
Cold water temperature*	5 - 12 °C	
Pump	Professional membrane carbonation pump	Professional rotary carbonation pump
Cooling technology	Ice bank - single stainless steel coil	
Ice bank capacity (l)	7	14
Ice bank (kg)	3	5
Condensation	Forced ventilation	
Refrigerant gas	R290	
Adjustable thermostat	Yes	
Supply	230 V - 50 Hz	
Compressor power	1/8 HP	1/5 HP
Absorbed power	300 W - 1,3 A	505 W - 2,2 A
Working room temperature	Min 5°C - Max 35°C	
Inlet water pipe	Ø5/16" (8 mm)	
Inlet CO ₂ pipe	Ø5/16" (8 mm)	
Typology	Undercounter	
Net weight (kg)	22	29
Gross weight (kg)	24	32
Dimensions W x D x H (mm)	318 x 335 x 467	320 x 456 x 467
Packaging dimensions (mm)	360 x 360 x 650	400 x 570 x 650
Dispensing options	Cold still water, cold sparkling water and room temperature water	
Materials	Robust stainless steel	

OPTIONAL

Water pressure reducer	
CO ₂ pressure reducer	
Filters	Activated carbon filter + UVC
Filtration	UF or reverse osmosis.
Anti-flooding device	Water Block
Taps	Mechanical or electronic

* rated at a room temp. of 25 °C and inlet water temp. of 20 °C
For a proper installation of the system, the use of the WATER BLOCK is compulsory.

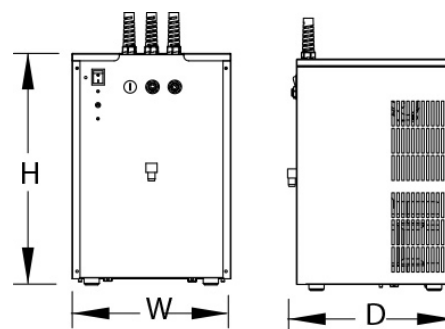

CERTIFICATIONS

