



Piccola hot

15
l/hGAS
R600

BDC

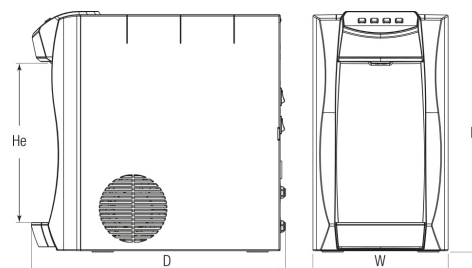
energy
saving

fizz

hot

PICCOLA HOT 15

Cooling capacity (l/h)	15
Max continuous supply (l)	2
Cold water temperature*	5 - 12 °C
Pump	Professional membrane carbonation pump
Cooling technology	Blupura Direct Chill
Tank capacity (l)	2,75
Condensation	Forced ventilation
Refrigerant gas	R600
Max hot water temperature	82°C +/-5%
Boiler capacity (l)	1
Heating capacity (l/h)	4
Watt boiler	600 W
Adjustable thermostat	Yes
Supply	230 V - 50 Hz
Compressor power	1/10 HP
Absorbed power (mod. Hot Fizz)	810 W - 3,40 A
Working room temperature	Min 5°C - Max 35°C
Inlet water pipe	Ø1/4" (6,35 mm)
Inlet CO ₂ pipe	Ø1/4" (6,35 mm)
Dispensing area height (mm)	281
Typology	Countertop
Net weight (kg)	18
Gross weight (kg)	19
Dimensions W x D x H (mm)	240 x 451 x 425
Packaging dimensions (mm)	500 x 266 x 489

**CERTIFICATIONS**

Dispensing options	Cold still water, cold sparkling water, room temperature water and hot water (mod. Hot Fizz) or Cold still water, room temperature water and hot water (mod. Hot)
Materials	ABS plastic
Alarms	No water, flooding, boiler probe failure, boiler failure

OTHER CHARACTERISTICS

Energy saving device.
Safety device to prevent accidental hot water dispensing.

OPTIONAL

Filters	UVC out
---------	---------

* rated at a room temp. of 25 °C and inlet water temp. of 20 °C